





### ● Features:

- Wide Input Supply Range
- Low leakage current <1mA.
- Protections: Short Circuit / Over load / Over voltage / Over Temperature
- 100% Full Load Burn in test.
- High efficiency, long life and high reliability
- Miniature size, High power density

### SPECIFICATION

MODEL		S480-12	S480-24	S480-48
Output	DC Voltage	12V	24V	48V
	Rated Current	40A	20A	10A
	Current Range	0 ~ 40A	0 ~ 20A	0 ~ 10A
	Rated Power	480W	480W	480W
	Ripple and Noise Max.	< 1% Of Rated Voltage.		
	Voltage Adj. Range	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V
	Voltage Tolerance	< 1% Of Rated Voltage.		
	Line Regulation	< +/- 0.5 %		
	Load Regulation	< +/- 1 %		
	Hold up Time	> 20mSec		
Input	Voltage Range	170 VAC - 300 VAC		
	Frequency	45Hz - 65Hz		
	Efficiency	>80%		
	Inrush Current	<40A At 230VAC		
	Leakage Current	<1mA At 230VAC		
Protection	Over Load	Above 105% Rated output Power Protection Type: Hiccup Mode, Recovers automatically after fault condition is removed.		
	Over Voltage	15.0 ~ 17.0V	27 ~ 29V	54 ~ 56V Protection Type: Hiccup Mode, Recovers automatically after fault condition is removed.
Environment	Working Temp.	-5DegC to 55DegC.		
	Working Humidity	20 to 90%RH Non Condensing.		
	Storage Temp Humidity	-10 to 85DegC 10 to 95% RH.		
	Vibration	10 to 500Hz,2G,20min/sweep,peroid-1Hr,Each along X,Y,Z axes.		
Safety & EMC	Safety Standard	Designed to meet UL60950-1		
	Withstand Voltage	I/P-O/P : 2KVAC , I/P-Earth : 1.5KVAC , O/P-Earth : 500VDC.		
	Isolation Resistance	I/P-O/P , I/P-Earth , O/P-Earth : 100M Ohms / 500VDC.		
	EMI & EMC	Designed to meet EN55011		
Other	Enclosure Protection	IP-20		
	Cooling	Forced Cooling.		
	Dimension	202*135.5*72(L*W*H)		
Note	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25Deg.C. ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF &amp; 47uF parrallel capacitor.</p> <p>3. Tolerance : includes set up tolerance , line regulation and load regulation.</p> <p>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-conformed that it still meets EMC diretives.</p>			
<p><b>Nuteck Products, 115 / 5 , Ramtekdi Industrial Area, Hadapsar, Pune - 411 013.</b>  <b>Tel: +91 20 26811161/62, F: +91 20 26811163 Email : info@nuteckproducts.com</b>  <b>Web : www.nuteckproducts.com www.batterychargerindia.com</b></p>				

**DIMENSIONAL DETAILS**

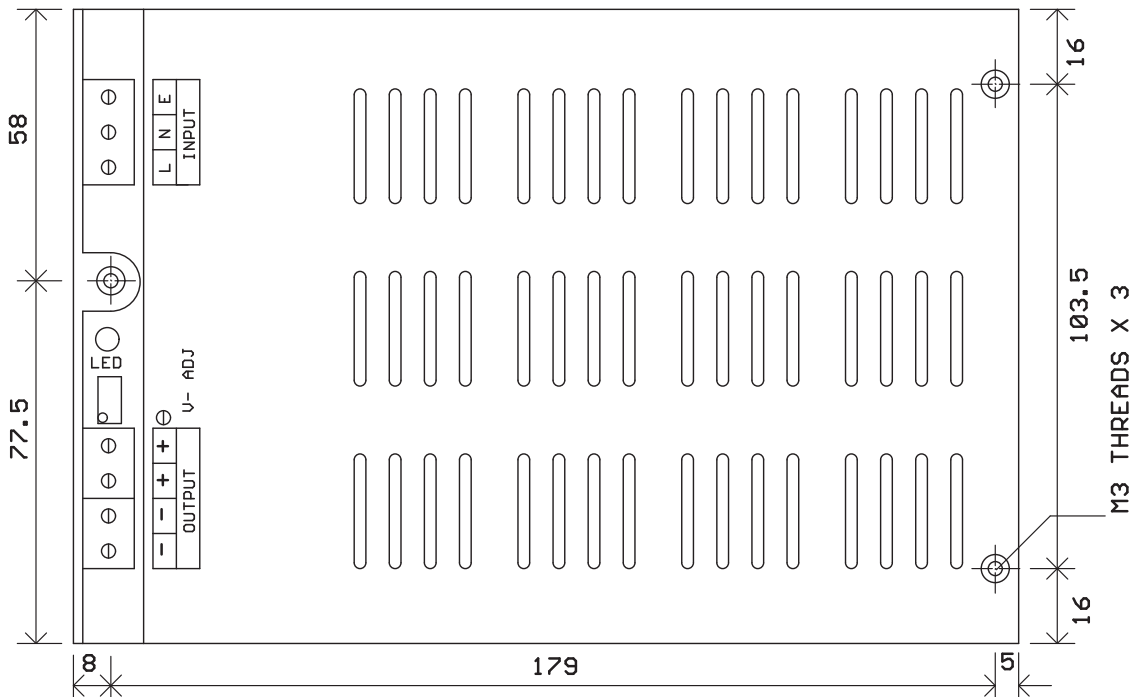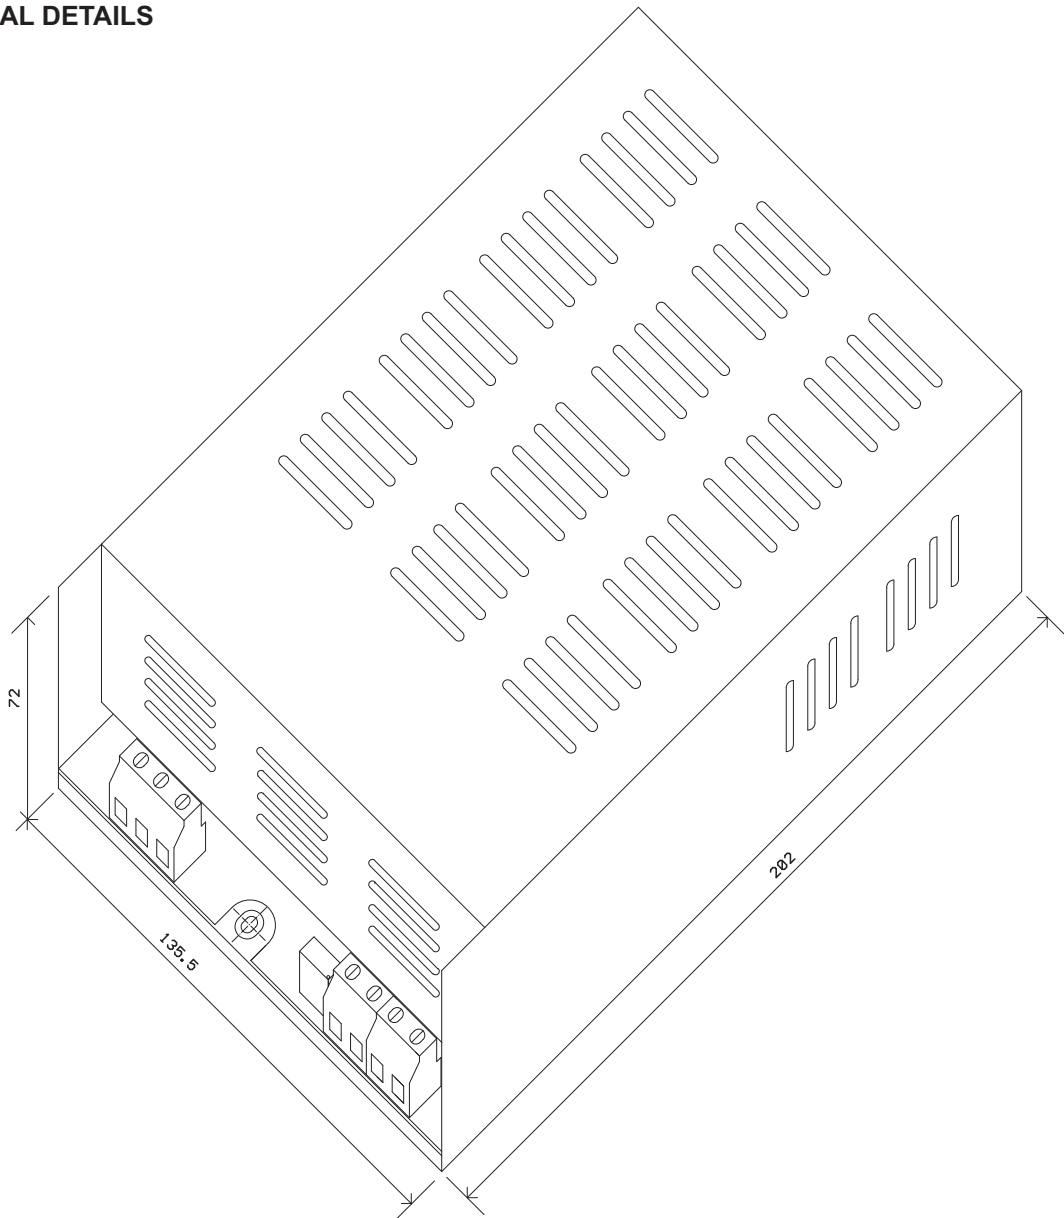

Nuteck products, 115/5, Ramtekdi industrial Area, Hadapsar, Pune-411 013  
 Tel: +91 20 26811161/62, F: +91 20 26811163 Email: info@nuteckproducts.com  
 Web: www.nuteckproducts.com www.batterychargerindia.com